LEGIBILITY NOTICE

A major purpose of the Technical Information Center is to provide the broadest dissemination possible of information contained in DOE's Research and Development Reports to business, industry, the academic community, and federal, state and local governments.

Although portions of this report are not reproducible, it is being made available in microfiche to facilitate the availability of those parts of the document which are legible.



Los Alamos National Laboratory is operated by the University of California for the United States Department of Energy under contract W-7405-ENG-36

LA-UR--87-297

DE87 006074

TITLE: SCALING LAWS FOR ABERRATIONS IN MAGNETIC QUADRUPLE LENS SYSTEMS

AUTHOR(S): R. W. Moses, CTR-6

E. A. Heighway, AT-6

R. S. Christian, Dept. of Physics, Purdue University

A. J. Dragt, Dept. of Physics and Astronomy, Univ. of MD

SUBMITTED TO:

1987 Particle Accelerator Conference March 16--19, 1987, Washington, DC

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Nother the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise dies not necessarily constitute or imply its endorsement, recomriendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

By acceptance of this article, the publisher recognizes that the U.S. Government retains a nonexclusive royalty-free license to publish or reproduce the published form of this contribution, or to allow others to do so, for U.S. Government purposes

The Los Alamos National Laboratory requests that the publisher identify this article as work performed under the auspices of the U.S. Department of Energy



Los Alamos National Laboratory
Los Alamos, New Mexico 87545

FORM NO 836 R4 51 NO 2629 5:81 DISTRIBUTION OF THE HOLDER OF THE CHARLES

R. V. Moses and E. A. Heighway Los Alamos National Laboratory Los Alamos, New Mexico 87545

R. S. Christian Dept. of Physics, Purdue University

A. J. Dragt Dept. of Physics and Astronomy The University of Maryland

Abstract: A comparison has been made of the third-order (spherical) aberrations in magnetic quadrupole lenses for use in conventional charged particle beam transport systems. An analytical description of the aberrations is presented and this is compared with the results of high order numerical integration. The dependence of the aberration strength on the system geometr; and f number is given and a comparison of doublet and triplet systems made. The reduction of the aberrations in both doublet and triplet systems using embedded magnetic occupole lenses is also discussed and analytical predictions are given.

Introduction

The focusing properties of quadrupole lens systems have been studied for many years [1,2,3,4,5]. As in the case of round lenses [5], the third-order aperture (spherical) aberrations cannot be eliminated by any combination of electrostatic and magnetic quadrupoles using nonrelativistic charged particle beams [3]. It is possible to reduce or eliminate third-order aperture aberrations with certain combinations of quadrupoles and octupoles [1]. This paper will be restricted to consideration of magnetic quadrupole doublets and triplets and to correction of aperture aberrations with the addition of octupoles.

Given the quadrupole and octupole gradient functions on the optic axis, it is relatively easy to compute the system aberrations. Unfortunately the correlation between system aberrations and simple lens parameters such as length, radius, and position is not obvious. The purpose of this paper is to provide the reader with some simple analytic approximations of quadrupole aberrations and octupole correction. These are intended to guide the system designer to nearly optimal lens configurations that suit his purpose. Once a general system configuration is established, specific computer modeling will complete the design.

Linear Properties of Quadrupole Systems

In this study, the z-axis of a cartesian coordinate system is the optic axis of the lensen. The vacuum magnetic fields of the quadrupoles and occupoles are given by scalar magnetic potentials ${\bf V}_{\bf Q}$ and ${\bf V}_{\bf Q}$ respectively

$$\mathbf{B} = -\nabla \mathbf{V}_{\mathbf{Q}} - \nabla \mathbf{V}_{\mathbf{Q}} \quad . \tag{1}$$

When q and p are the charge and magnitude of momintum for a particle, the magnetic scalar potentials are written as follows

$$(q/p)V_{Q} = -xy\phi(x) + xy(x^{2} + y^{2})\phi''/12 + \cdots$$
 (2)

$$(q/p)V_0 = -xy(x^2 - y^2) + (3 + \cdots)$$
 (3)

*Work performed under the auspices of the US Department of Energy and supported by the US Army Strategic Defense Command.

The equations of motion are formed as pover series expansions of x and y and their derivatives with respect to z, designated by primes. When only the linear terms are retained, one has the paraxial equations

$$x'' + \phi(z)x = 0, y'' - \phi(z)y = 0$$
 (4)

Let us consider an optical system where the object is at z_0 , the lenses are between z_0 and the aperture plane at z_0 and the image is at z_1 . The characteristic functions are solutions of Eq. (4) that satisfy the following initial conditions

$$h_{xo} = h_{yo} = g'_{xo} = g'_{yo} = 0$$

 $h'_{xo} = h'_{yo} = g_{xo} = g_{yo} = 1$. (5)

Any paraxial solution is now defined as follows

$$x(z) = ch_{x}(z) + x_{0}g_{x}(z), y(z) = \beta h_{y}(z) + y_{0}g_{y}(z)$$
 (6)

where $\alpha = x_0'$ and $\beta = y_0'$. By definition, an image plane is one in which

$$h_{xi} = h_{vi} = 0, g_{xi} = H_{x}, g_{vi} = H_{v}$$
 (7)

where $\mathbf{H}_{\mathbf{x}}$ and $\mathbf{H}_{\mathbf{y}}$ are the system magnification in the $|\mathbf{x}|$ and $|\mathbf{y}|$ coordinates respectively.

Aperture Aberrations

The complete equations of motion are expressed by the paraxial equations, Eq. (4), plus nonlinear series expansions on the right-hand side of each equation. When the first additional term, third-order, is added to each equation, one gets the following solution for particles coming from a point near the cptic axis at π_0 [3,7],

$$x_{1} = (x|x)x_{0} + (x|aaa)\alpha^{3} + (x|abb)\alpha\beta^{2}$$

$$\pi H_{x}(x_{0} + C_{1}\alpha^{3} + C_{2}\alpha\beta^{2}) \qquad (5)$$

$$y_{1} = (y|y)y_{0} + (y|bbb)\beta^{3} + (y|aab)\alpha^{2}\beta$$

$$\approx H_{y}(y_{0} + D_{1}\beta^{3} + D_{2}\alpha^{2}\beta).$$

The off axis aberrations such as coma, astigmatism, and distortion have been left out, consistent with the assumption of having \mathbf{x}_0 and \mathbf{y}_0 small. The three independent aperture aberration coefficients can be reduced to the following integrals

$$C_{1} = \int_{z_{0}}^{z_{1}} \left[h_{x}^{4}/6 + (\phi^{2} + \psi)h_{x}^{4}/3 \right] dz ,$$

$$C_{2} = D_{2} = \int_{z_{0}}^{z_{1}} \left[1.5h_{x}^{2} h_{y}^{2} + (\phi^{2} - \psi)h_{x}^{2} h_{y}^{2} \right] dz , (9)$$

$$D_{1} = \int_{z_{0}}^{z_{1}} \left[h_{y}^{4}/6 + (\phi^{2} + \psi)h_{y}^{4}/3 \right] dz .$$

The positive definite form of these coefficients for quadrupoles alone [3] makes it necessary to use octupoles in combination with quadrupoles to achieve complete correction of third-order aperture aberrations[1].

There have been several formal optimization studies of quadrupole octupole systems [5,8,9] with the intended applications being in electron microscopy. This discussion is limited to simpler systems with more general applications.

Analytic Models

In this section, doublets and symmetric triplets are considered. Both the x and y trajectories have a common object plane at \mathbf{z}_0 and are focused to a virtual image at infinity.

Doublets: The doublet is illustrated in Fig. 1. The lenses are positioned at L_1 and L_2 and are of lengths θ_1 and θ_2 respectively. Their center to center separation is σ and the object to aperture length is L.

The quadrupole gradient function is taken to be either zero or ϕ_n where n denotes the lens. Unlike round lenses, a sudden jump in $\phi(z)$ is permissible because derivatives of ϕ do not appear in Eq. (9). Using the following definition,

$$\mathbf{F}_{\mathbf{x}\mathbf{n}} = -\mathbf{F}_{\mathbf{y}\mathbf{n}} = 1/(\phi_{\mathbf{n}}^{\dagger}\mathbf{n})$$
, (10)

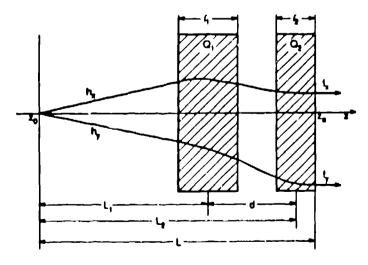


Fig. 1. Schematic description of a quadrupole doublet.

it can be shown that the focal lengths of the individual lenses are

$$f_{x,vn} = F_{x,vn}/\{1 - f_n/(6F_{x,vn})\}$$
 (11)

Subscripts x,yn refer to either the x or y coordinates.

The total focal length of the system in each coordinate is given by the formula

$$1/f_{x,y} = 1/f_{x,y1} + 1/f_{x,y2} - d/(f_{x,y1} f_{x,y2})$$
 (12)

After some algebra, one gets the following approximate

$$F_{x2} = -\left\{ dL_2 \left[1 - (L_2!_1/L_1 + !_2)/(6d) \right] \right\}^{1/2}$$
 (13)

$$F_{x1} = -F_{x2} L_1/L_2$$
 (14)

$$f_{x,y} = L_1/(1 - d/f_{x,y2})$$
 (15)

Using Eqs. (9)--(15), the aperture aberration coefficients of a doublet are approximated by

$$c_{1} = \{L_{1} + (f_{x} - L_{1})^{4}/d^{3}\}/6$$

$$+ [L_{1}^{4}/(t_{1}f_{x1}^{2}) + f_{x}^{4}/(t_{2}f_{x2}^{2})]/3$$

$$c_{2} = D_{2} = 1.5[L_{1}^{4} + (f_{x} - L_{1})^{2}(f_{y} - L_{2})^{2}/d^{3}] (16)$$

$$+ L_{1}^{4}/(t_{1}f_{x1}f_{y1}) + f_{x}^{2}f_{y}^{2}/(t_{2}f_{x2}f_{y2})$$

$$D_{1} = [L_{1} + (f_{y} - L_{1})^{4}/d^{3}]/6$$

$$+ [L_{1}^{4}/(t_{1}f_{y1}^{2}) + f_{y}^{4}/(t_{2}f_{y2}^{2})]/3.$$

The focal lengths and aperture aberration coefficients of several doublets were computed analytically using Eqs. (10)--(16) and numerically using the codes MARYLIE [10] and GIOS [11]. These examples are presented in Table 1 with the numerical results in parenthesis. When the quedrupole lens lengths are equal, and the doublet takes up no more than 50% of L, the analytic approximations are in excellent agreement with the precise numerical results. If the quadrupoles are short and unequal in length, the agreement is still good. When \hat{t}_1 and \hat{t}_2 are very different, and the doublet takes up 50% of L, as the last case in Table 1, there can be a larger error in C_1 or D_1 . In this instance D_1 was overestimated by 6%.

Triplet: Although it would be possible to derive a set of relationships similar to Eqs. (10)--(16) for triplets, the procedure would be quite tedious. The doublet relationships can be used to represent a triplet quite veil. Let us form a triplet by combining two mirror-image doublets. The doublet nearest the object is designated by (1) and its parameters are given in terms of the triplet as follows

$$t_1^4 = t_1 = t_3, \quad t_2^4 = t_2/2, \quad d^4 = d - t_2/4 \quad (17)$$

For the purpose of the aberration calculation we define

$$L_1^{\star} = L_1 + L_2, \quad L_2^{\star} = L_1^{\star} + d^{\star}, \quad L^{\star} = 2L_2 \quad . \quad (18)$$

The variables designated by (*) are used to compute $C_1^\pm,$ C_2^\pm and $D_2^\pm,$ then the triplet aberrations and focal lengths are given by

$$c_1 = c_1^*/8$$
, $c_2 = D_2 = c_2^*/8$, $D_1 = D_1^*/8$, $f_x = f_y = L_2$ (19)

As an example, a triplet in arbitrary units with L_1 = 20.75, L_2 = 23.5, L_3 = 26.25, t_1 = t_3 = 1.5, and t_2 = 3 has analytic and (numerical) aberration coefficients of C_1 = 2280 (2550), C_2 = D_2 = 10,500 (10,600) and D_1 = 6110 (5580) with focal lengths f_X = 23.5 (24.7) and f_Y = 23.5 (22.8).

An intriguing result of this exercise is that a triplet focused to infinity can be turned into a doublet by turning off the central quadrupole, changing the sign of one of the end lenses and slightly readjusting their strengths. If $t_2=2t_1=2t_3$ in the triplet, this change from a triplet to a doublet will reduce the aperture aberrations by about a factor of 2. The doublet will have somewhat more asymmetric values of C_1 and D_2 .

Octupole Aberration Correction

A thorough mathematical treatment of octupole aberration correction is beyond the scope of this paper; however, one does exist in Ref. [9]. Careful study of Eq. (9) leads to the following aummary. There must be at least three octupoles ideally centered at \mathbf{z}_b , \mathbf{z}_c and \mathbf{z}_d to completely correct third-order aperture aberrations. For minimum strength octupoles, the following inequalities must be maximized.

$$(h_x/h_y)_b^2 > (h_x/h_y)_c^2 > (h_x/h_y)_d^2$$
 (20)

The signs of $\psi(z_b)$ and $\psi(z_d)$ will be negative and $\psi(z_c)$ nositive.

The success of correction depends on having large asymmetries in h, and h,. For example, a triplet is more nearly symmetric than's doublet. It can be shown that the triplet described in the previous section requires about eight times more octupole strength to correct than the corresponding doublet.

Conclusion

In this brief discussion we have considered quadrupole doublets and symmetric triplets that focus trajectories from a point object to infinity. Analytic approximations were derived for the system focal lengths and aperture aberration coefficients. When the quadrupole lengths, $\theta_{\rm p}$, and separation d are very small compared to the object to aperture distance, L, the aperture aberration coefficients are roughly proportional to L $/(\theta_{\rm n}d)$. If the doublet or triplet takes up a significant fraction of L ($\geq 20\%$), form factors inherent in Eqs. (10)--(19) substantially alter this scaling. A separate study using the code GENMAP [12] has indicated that realistic lenses with a pole tip radius $r_{\rm p}$ that satisfies $r_{\rm p} \geq \theta_{\rm p}$ will have aperture aberrations about half as big as those coming from the "boxcar" fields in this paper.

It is observed in this paper that although a triplet is aesthetically symmetric, it will have about twice as much aperture aberration as a comparably sized doublet. Also such a triplet will require octupoles that are about eight times as strong as the corresponding doublet.

References

- [1] O. Scherzer, Optik, vol. 10, pp. 114-132, 1947.
- [2] P. V. Havkes, <u>Quadrupole Optics</u>, (Springer Tracts Mod. Phys. vol. 42) Berlin, Springer, 1966.
- [3] R. W. Moses, <u>Rev. Sci. Instr.</u>, vol. 37, pp. 1370-1372, 1966.
- [4] H. Rose, Optik, vol. 26, pp. 289-298, 1967.
- [5] R. W. Moses, pp. 729-740, 1970. Rev. Sci. Instr, vol. 41,
- [6] O. Scherzer, Z. Phys., vol. 101, pp. 593-603, 1936.
- [7] H. Vollnik, Charged Particle Optics, to be published.
- [8] R. Moses, Rev. Sci. Instr., vol. 42, pp. 828-831, 1971.
- [9] R. Hoses, <u>Rev. Sci. Instr.</u>, vol. 42, pp. 832-639, 1971.
- [10] A. Dragt and L. Healy, IEEE Trans. on Nucl. Sci.) vol. NS-32, p. 2311, 1985.
- [11] H. Wollnik, J. Brezina, and C. Geisse, "GIOS -A Program for the Design of Ion Optical Systems," Physikalisches Institut, Univ reitaet Giessen, W. Germany, June 1986.
- [12] R. Ryne and F. Nire, private communication, 1986.

TABLE I

EXAMPLES OF ANALYTICALLY AND (NUMERICALLY) OBTAINED FOCAL LENGTHS AND APERTURE ABERRATION COEFFICIENTS FOR DOUBLETS

L ₁	L ₂	*1	12	f _x	fy	c	C_2,D_2	D ₁
(w)	(m)	(=)	(m)	(m)	(m)	(m)	(m)	(m)
17.5	19.5	1	1	12.8 (12.8)	26.6 (26.6)	1440 (1390)	7620 (7510)	6340 (6130)
15.5	19.5	1	1	10.4	29.1 (29.0)	472 (456)	2730 (2710)	3770
15	19	2	2	9.80	29.3	228	1480	(3640) 2180
14	19	4	2	(9.81) 8.68	(29.2)	(212) 82.4	(1430) 932	(2020) 2630
13	19	6	2	(8.70) 7.66 (7.73)	(31.2) 36.7 (33.3)	(74.9) 35.4 (35.3)	(848) 706 (610)	(2170) 3830 (2380)